


Foundation (trench) blocks

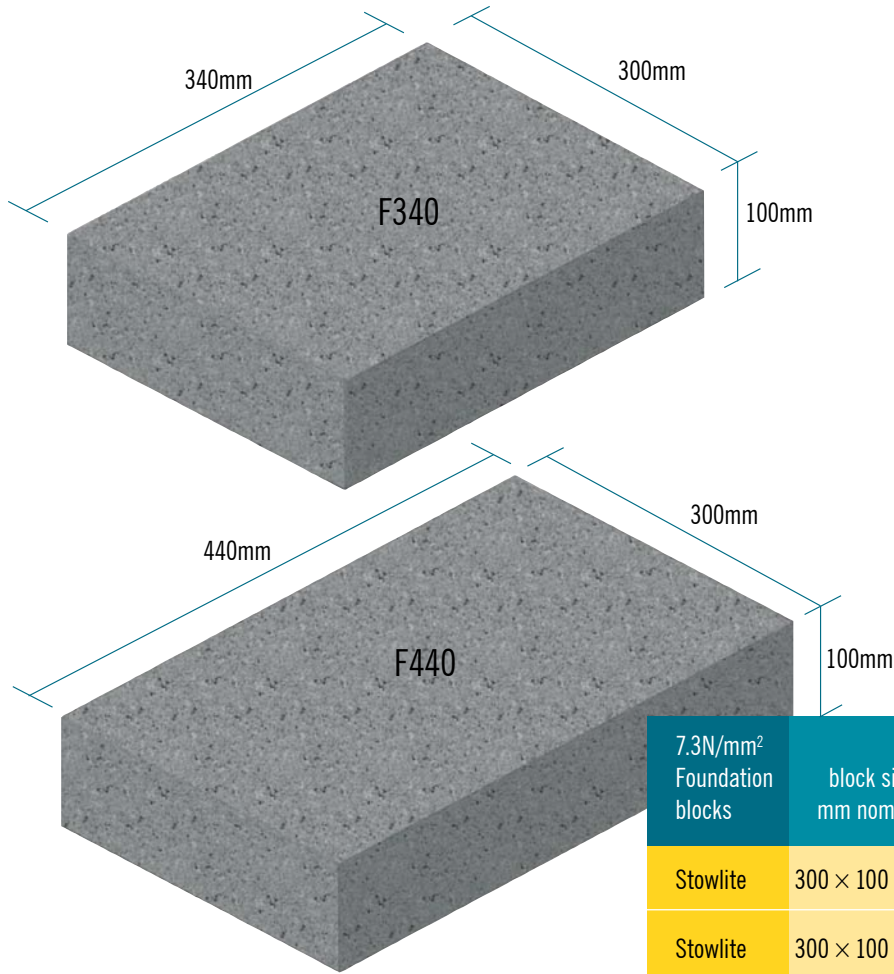

7.3N/mm ² Foundation blocks	block size mm nominal	approx oven-dry density kg/m ³	approx weight kg	no. per tonne	multiples of	no. per pack
Stowlite	300 × 100 × 440	1400	19	52	33	66
Stowlite	300 × 100 × 340	1400	15	66	33	66

We have two designs of foundation block. Both types have a 300mm wide dimension which allows for a 100mm inside and 100mm outside skin of blockwork or brickwork to be built, leaving a 100mm cavity.

Wider cavities or thicker block widths can be accommodated by using the F340 foundation block laid with the 340mm dimension across the wall.

Foundation blocks are available in Stowlite medium dense concrete 7.3 N/mm².

When F440 Foundation blocks are laid 300mm wide there are 20 no. per m².

When F340 Foundation blocks are laid 300mm wide there are 26 no. per m². Where they are laid 340mm wide there are 29 no. per m².

Padstones



Size mm	approx weight kg	no. per tonne	no. per pallet
440 × 215 × 140	32	31	40
215 × 215 × 140	16	62	80
440 × 215 × 100	22	45	50
215 × 215 × 100	11	90	100
440 × 140 × 100	15	66	80
300 × 140 × 100	10	100	120
215 × 140 × 100	8	125	140

We produce a useful range of padstones. Manufactured to a 50 N/mm² compressive strength, they are suitable for the majority of applications where a high-strength bearing pad is required – such as under steel joists. The padstones are produced in a range of sizes designed to fit most block and pier dimensions.

All products are available ex works.

Prices on application.

Telephone our sales office for further information and quotations.

STOWELL
CONCRETE LIMITED