



Permeable paving

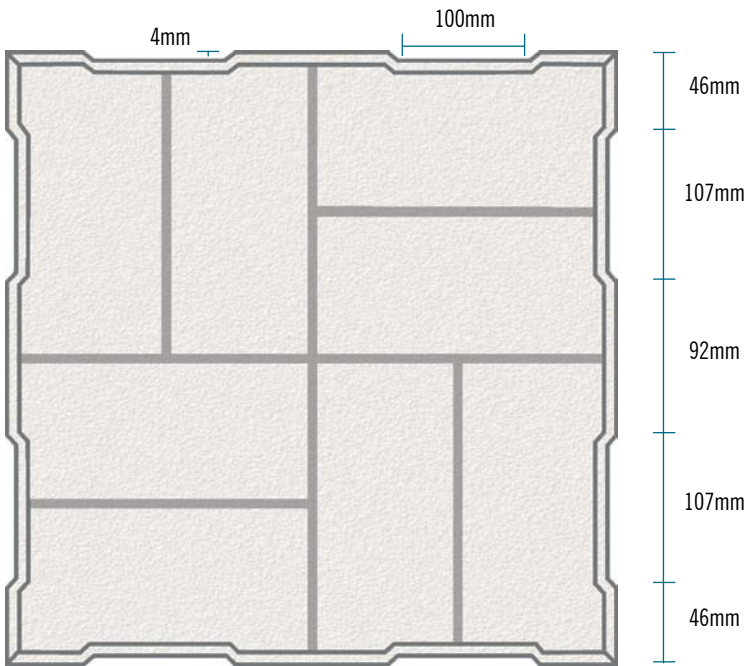

CHESSBOARD PATTERN

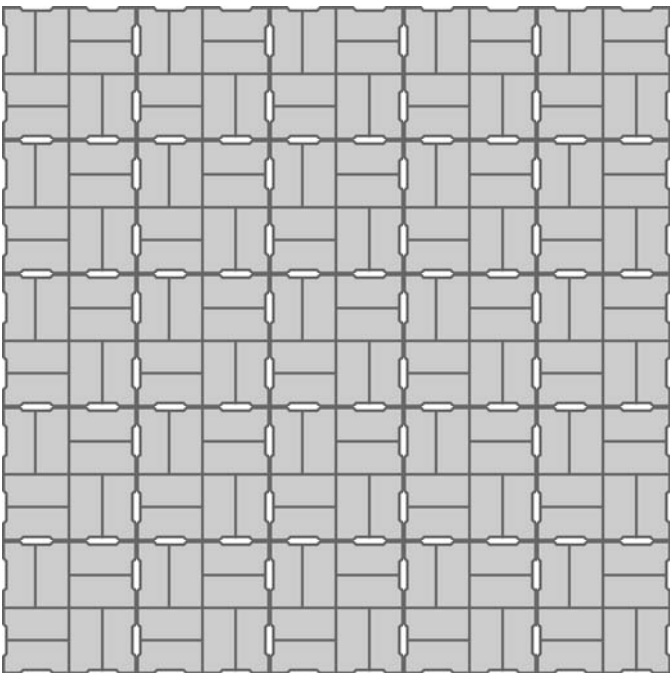

Permeable paving is designed to help with the requirements of Sustainable Urban Drainage Schemes (SUDS). We now offer a bevelled edge 400mm x 400mm hydraulically pressed slab that is designed to allow water to flow between the specially designed gaps.

The gaps between the slabs should be filled with 2/6.3mm material (to BS EN 12620) to allow water to permeate into a 50mm layer of the same material. Below this layer there should be a layer of 4/20mm of open-graded granular sub-base type 4/20 (to BS EN 13242).

The resultant 8mm wide gaps create 2% of the surface area as voids.

Permeable slabs are available in 50 and 65mm thicknesses and in both grey and buff colours.



STOWELL
CONCRETE LIMITED

Arnolds Way, Yatton, Bristol BS49 4QN
also at Holcombe, Cheddar & Weston-s-Mare
Tel: 01934 834000 Fax: 01934 835474
www.stowellconcrete.co.uk

11/11