
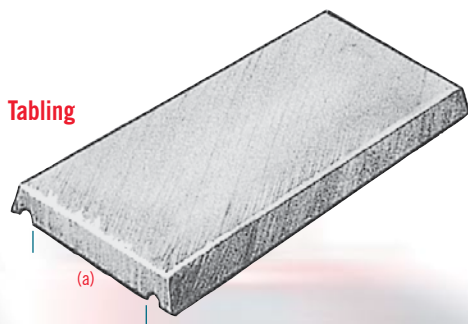
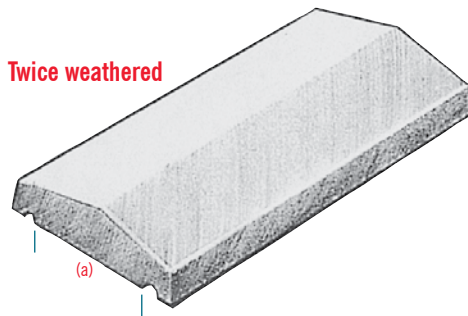


Wall coping

All copings are 600mm (24in) in length

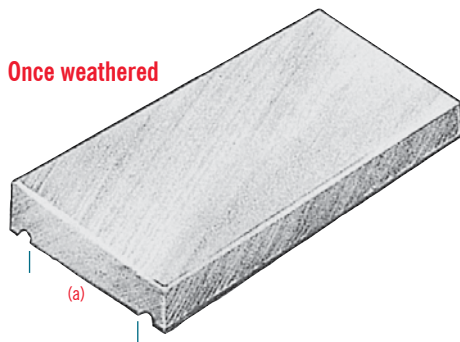

Width		dimension (a)	no. per tonne	no. per pallet
175mm (7in)	65 – 45mm	120mm	76	80
230mm (9in)	70 – 50mm	175mm	54	64
300mm (12in)	75 – 50mm	250mm	38	50
350mm (14in)	75 – 50mm	295mm	33	50
400mm (16in)	75 – 50mm	350mm	29	30
450mm (18in)	75 – 50mm	400mm	26	30
510mm (20in)	75 – 50mm	455mm	23	30
610mm (24in)	75 – 50mm	555mm	19	30
Width				
140mm (5½in)	50 – 35mm*	n/a	120	100
175mm (7in)	65 – 45mm	120mm	76	80
230mm (9in)	70 – 50mm	175mm	54	64
300mm (12in)	75 – 50mm	250mm	38	50
350mm (14in)	75 – 50mm	295mm	33	50
400mm (16in)	75 – 50mm	350mm	29	30
450mm (18in)	75 – 50mm	400mm	26	30
510mm (20in)	75 – 50mm	455mm	23	30
610mm (24in)	75 – 50mm	555mm	19	30
Width				
300mm (12in)	50mm	250mm	48	50
350mm (14in)	50mm	295mm	41	50

*no drips

Copings are available in Once-Weathered, Twice-Weathered and Tabling styles in the standard smooth grey finish.

While every effort is made to ensure that the colours of our products do not vary, complete colour consistency cannot always be guaranteed.

All products are available ex works.

Prices on application. Telephone our sales office for further information and quotations.

STOWELL
CONCRETE LIMITED

Arnolds Way, Yatton, Bristol BS49 4QN
also at Holcombe, Cheddar & Weston-s-Mare
Tel: 01934 834000 Fax: 01934 835474
www.stowellconcrete.co.uk

11/11