

Vintage flagstones... traditional style decorative flags

Our Vintage Flagstones are ideal for creating that period character which is in keeping with older properties. Produced in a natural stone grey, they are suitable for any domestic application from paths or patios to driveways.

Available in a variety of sizes, as detailed below, these authentic style flagstones can be laid out in a surprising number of different traditional designs – the most common layouts are shown right and opposite for your convenience.

With all our outdoor concrete products, we use a high cement content, tough enough to withstand even the most adverse weather conditions*. The stone grey finish of these high quality flagstones has minor variations which help create their natural appearance.



24in×24in



24in×12in



30in×24in



12in×12in



24in×18in



18in×18in



18in×12in

*NB. The use of rock salt can seriously affect the surface finish of these products.



36in×24in

WINTERSTOKE PATTERN


2 no. 36in×24in = 12ft²

2 no. 30in×24in = 10ft²

2 no. 24in×12in = 4 ft²

1 no. 18in×12in = 1.5ft²

27.5ft² (2.5m²)

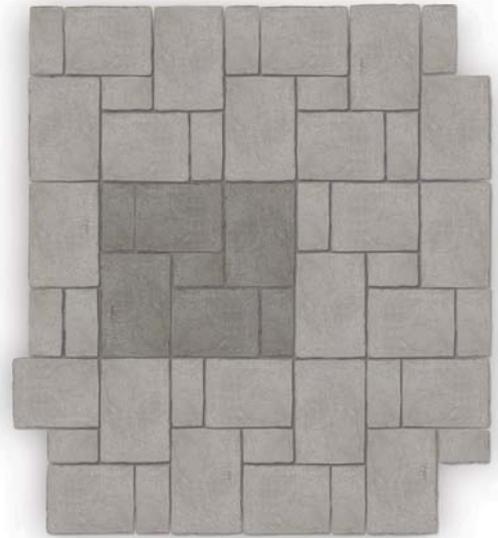

TUDOR PATTERN

1 no. 24in×24in = 4ft²

1 no. 24in×12in = 2ft²

1 no. 12in×12in = 1 ft²

7ft² (0.65m²)



12in×12in & 24in×12in around perimeter to suit

STOWELL
CONCRETE LIMITED

Tel: 01934 834000 Fax: 01934 835474

Some sample paving patterns

HERRINGBONE PATTERN

2 no. 24in×12in = 4ft²

4ft² (0.37m²)

12in×12in around perimeter to suit



TICKENHAM PATTERN

1 no. 24in×24in = 4ft²

1 no. 24in×18in = 3ft²

1 no. 18in×18in = 2.25ft²

1 no. 18in×12in = 1.5ft²

2 no. 24in×12in = 4ft²

1 no. 12in×12in = 1ft²

15.75ft² (1.46m²)

The gap between products may vary from $\frac{3}{8}$ inch to $1\frac{1}{2}$ inch and in our opinion look better grouted with mortar coloured with black pigment and left approximately $\frac{3}{8}$ inch lower than the surface of the slabs. Vintage slabs are typically $1\frac{5}{8}$ inch thick

While every effort is made to ensure that the colours of our products do not vary, complete colour consistency cannot be guaranteed.

The range of slabs average unit weight is 9kg/ft² or 98kg/m² which equates to an area of 110ft² per tonne or 10.2m² per tonne.

- Slabs in excess of 20kg – please use with caution after assessing the risks.

Size nominal	approx weight kg	no. per tonne	no. per pallet
36in×24in	57•	17	22
30in×24in	47•	21	22
24in×24in	37•	27	22
24in×18in	27•	37	22
18in×18in	21•	48	22
24in×12in	17	58	22
18in×12in	13	77	22
12in×12in	8	125	44

COURTYARD PATTERN

2 no. 24in×24in = 8ft²

8ft² (0.74m²)



24in×12in around perimeter to suit

DUTCH PATTERN

1 no. 24in×24in = 4ft²

1 no. 12in×12in = 1ft²

5ft² (0.46m²)



12in×12in & 24in×12in around perimeter to suit

All products available ex works. Prices on application. Telephone the sales office for further information and a quotation.

STOWELL
CONCRETE LIMITED

02/16

www.stowellconcrete.co.uk