

Stowell Concrete Ltd

Product packaging data

The Stowell products listed in quantities per unit weight/band on the following pages are packaged in the methods coded **A** to **T** described below...




- A** Banded vertically with 2 polyester bands (10g/m) with inter-leaf dividers between kerbs (320gsm) and 2 timber strips 1m x 20mm x 7mm (110g each) between each layer.
- B** Banded vertically with 4 polyester bands (10g/m) with an inter-leaf divider (400g) with 4 timber strips 1m x 20mm x 7mm (110g each) between each layer.
- C** Polythene wrapped (150g) onto a timber pallet (17kg).
- D** Banded vertically with 2 polyester bands (10g/m) and 2 steel clips (5g each), onto a timber pallet (17kg) with 4 timber strips 1m x 20mm x 7mm (110g each) between each layer.
- E** Banded vertically with 2 polyester bands (10g/m) and 2 steel clips (5g each), onto a timber pallet (17kg) with 4 timber strips 1m x 20mm x 7mm (110g each) between each layer.
- F** Banded vertically with 2 polyester bands (10g/m) and 2 steel clips (5g each), onto a timber pallet (17kg) with up to 8 timber strips 1m x 20mm x 7mm (110g each) between each layer.
- G** No packaging.
- H** Banded vertically with 2 polyester bands (10g/m) and 2 steel clips (5g each), onto a timber pallet (17kg) with 0.56kg of straw rope.
- I** Banded vertically with 2 polyester bands (10g/m), each layer is separated by 2 timber strips 1m x 20mm x 7mm (110g each).
- J** Banded vertically with 4 polyester bands (10g/m) and 4 steel clips (5g each) onto a timber pallet (17kg).
- K** Banded vertically with 2 polyester bands (10g/m) and 2 steel clips (5g each) with 2 timber strips 1m x 20mm x 7mm (110g each) between layers. Each pack of products is delivered onto 2 pieces of timber dunnage 1m x 75mm x 75 mm (approx 4kg each).
- L** Each row of 8 products is delivered onto 2 pieces of timber dunnage 1m x 75mm x 75mm (approx 4kg each).
- M** Banded vertically with 2 polyester bands (10g/m) and shrink-wrapped with a polythene bag (740g) onto a timber pallet (17kg).
- N** Packed in a cardboard box (500g).
- O** Packed in a cardboard box (750g).
- P** Packed in a cardboard box (250g).
- Q** Banded vertically with 2 polyester bands (10g/m) and 2 steel clips (5g), onto a timber pallet (8kg) and shrink-wrapped with a polythene bag (740kg).
- R** Banded vertically with 2 polyester bands (10g/m) and 2 steel clips (5g), each onto a timber pallet (7.5kg) and shrink-wrapped with a polythene bag (415g).
- S** Banded vertically with a single polyester band (10g/m) and a steel clip (5g), onto a timber pallet (7kg) and shrink-wrapped with a polythene bag (330g).
- T** Banded horizontally with a single polyester band (10g/m) or two bands if the product is turned.

STOWELL
CONCRETE LIMITED

11/16

www.stowellconcrete.co.uk

Two-way pallet dimensions

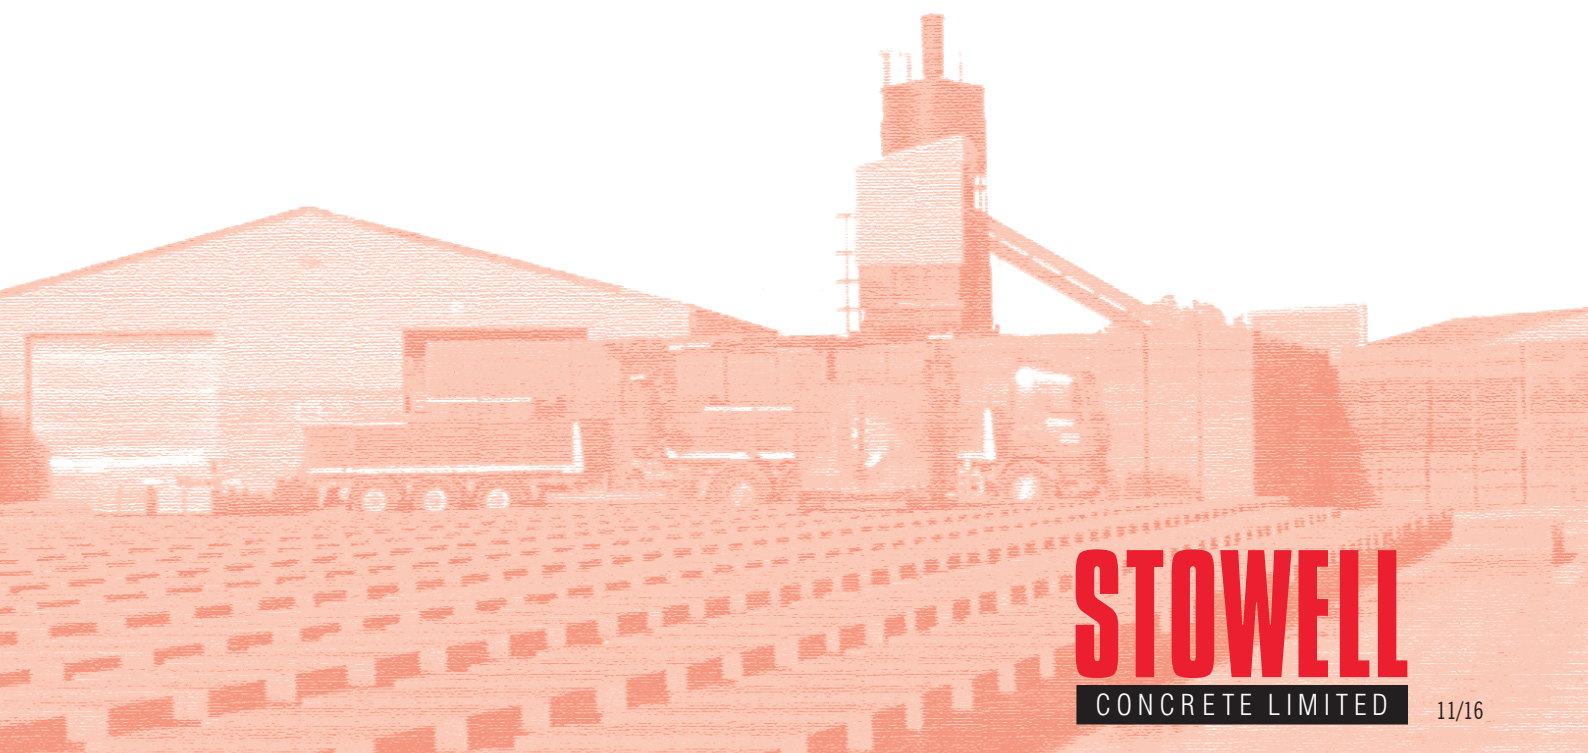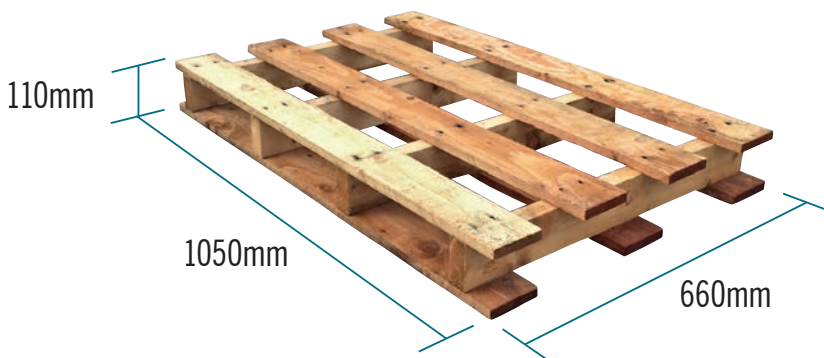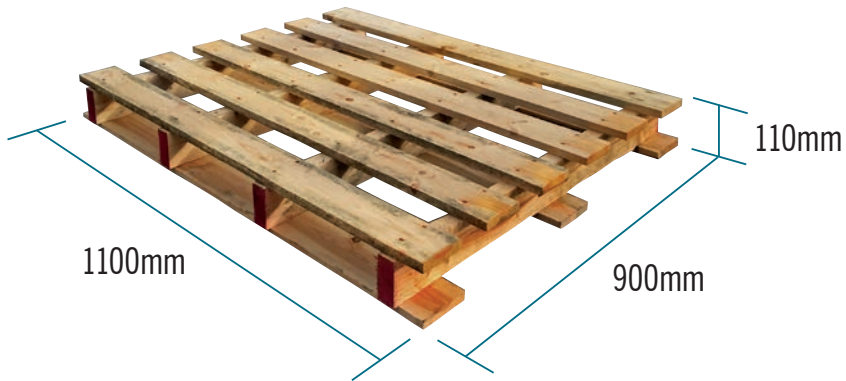

STOWELL
CONCRETE LIMITED

11/16

www.stowellconcrete.co.uk

Product packaging data and code

Per tonne	Banded in	HYDRAULICALLY PRESSED PAVING SLABS BS EN 1339 Limestone Aggregate	Packaging code
COMMERCIAL PRESSED PAVING			
16	20	900 x 600 x 50mm GREY	A
19	20	750 x 600 x 50mm GREY	A
24	20	600 x 600 x 50mm GREY, BUFF	A
32	40	450 x 600 x 50mm GREY, BUFF	A
42	40	450 x 450 x 50mm GREY, BUFF	A
48	20	300 x 600 x 50mm GREY, BUFF	A
54	40	400 x 400 x 50mm GREY	B
AVON UTILITY SLABS			
65	60	450 x 450 x 32mm GREY, BUFF, RED, CHARCOAL	B
30	25	600 x 600 x 38mm GREY, BUFF, RED, CHARCOAL	A
SOMERSET UTILITY SLABS			
65	60	450 x 450 x 32mm GREY, BUFF	B
30	25	600 x 600 x 38mm GREY, BUFF	A
TACTILE PAVING			
BLISTER			
42	40	450 x 450 x 50mm RED, BUFF	B
40	30	400 x 400 x 65mm RED, BUFF	B
54	40	400 x 400 x 50mm RED, BUFF, GREY	B
PLATFORM, CYCLEWAY			
54	40	400 x 400 x 50mm GREY, BUFF	B
HAZARD			
54	40	400 x 400 x 50mm GREY, BUFF, RED	B
BARFACED PAVING			
24	20	600 x 600 x 50mm GREY, BUFF	A
CHAMFERED EDGE			
40	30	400 x 400 x 65mm GREY	B
54	40	400 x 400 x 50mm GREY	B

STOWELL
CONCRETE LIMITED

Arnolds Way, Yatton,
Bristol BS49 4QN
also at Holcombe & Cheddar
Tel: 01934 834000
Fax: 01934 835474
www.stowellconcrete.co.uk
11/16

Product packaging data and code

Per tonne	Banded in	ROAD KERBS - HYDRAULICALLY PRESSED BS EN 1340 Limestone Aggregate	Packaging code
10	14	HALF BATTER 150 x 305mm HB1 (Fig 7)	A
15	16	125 x 255mm HB2 (Fig. 7)	A
24	16	125 x 150mm HB3 (Fig. 7a)	A
15	16	HALF BATTER - RADIUS 125 x 255mm HB2 INTERNAL & EXTERNAL	A
18	16	DROP KERBS (TAPERS) DL1/DR1 - DL2/DR2 (Fig.16) (HB2-BN3 & SP2-BN3 & BN2-BN3)	A
18	16	DROP KERB (TAPERS) - RADIUS DL1/DR1 (HB2-BN3)	A
10	14	BULLNOSED KERBS 150 x 305mm BN 1 (Fig 2)	A
14	16	125 x 255mm BN 2 (Fig. 2)	A
23	16	125 x 150mm BN 3 (Fig. 2a)	A
15	16	BULLNOSED KERBS - RADIUS 125 x 255mm BN 2 EXTERNAL ONLY	A
24	16	125 x 150mm BN 3 INTERNAL & EXTERNAL	A
15	8	FULL BATTERED (45° splayed) 125 x 255mm SP 2 (Fig 5)	A
24	8	125 x 150mm SP 3 (Fig 5a)	A
15	16	FULL BATTERED - RADIUS 125 x 255mm SP 2 EXTERNAL ONLY	A
14	16	SQUARE CHANNELS 255 x 125mm CS1 (Fig. 8)	A
23	16	150 x 125mm CS2 (Fig. 8)	A
15	16	DISHED CHANNELS 255 x 125mm CD	A
23	16	150 x 125mm CD	A
30	20	150 x 100mm CD	A
24	14	FLUTED CHANNELS 255 x 75mm	A
24	15	QUADRANTS - to match HB2, BN2, SP2 125 x 255mm (Fig.14) (305mm Radius)	C
10	8	QUADRANTS - to match HB2 (vibrated) 125 x 255mm (Fig.14) (455mm Radius)	C
27	16	INTERNAL & EXTERNAL ANGLES HB2, BN2 125 x 255mm IA & XA	C
15	16	TRANSITIONAL KERBS 125 x 255mm TL & TR (HB2-SP2, SP2-HB2 & HB2-BN2, BN2-HB2)	A
63	40	EDGINGS 50 x 150mm EF (Fig.11)	A
48	20	50 x 200mm EF (Fig.11)	A
36	20	50 x 255mm EF (Fig.11)	A
63	40	50 x 150mm EBN (Fig.13)	A
48	20	50 x 200mm EBN (Fig.13)	A
36	20	50 x 255mm EBN (Fig.13)	A

STOWELL
CONCRETE LIMITED

Arnolds Way, Yatton,
Bristol BS49 4QN
also at Holcombe & Cheddar
Tel: 01934 834000
Fax: 01934 835474
www.stowellconcrete.co.uk
11/16

Product packaging data and code

Per tonne	Banded in		Packaging code
EDGINGS			
62	100	6" x 2" x 36" Flat Top	D
62	100	6" x 2" x 36" Full Round Top	D
COPING - GREY 600mm long (2ft.) - twice throated			
120	100	140 (5 $\frac{1}{2}$ ") twice weathered ONLY 50 to 35	E
76	80	175 (7") once or twice weathered 65 to 45	E
54	64	230 (9") once or twice weathered 70 to 50	E
38	50	300 (12") once or twice weathered 75 to 50	E
33	50	350 (14") once or twice weathered 75 to 50	E
29	30	400 (16") once or twice weathered 75 to 50	E
26	30	450 (18") once or twice weathered 75 to 50	E
23	30	510 (20") once or twice weathered 75 to 50	E
19	30	610 (24") once or twice weathered 75 to 50	E
48	50	300 (12") tabling 50mm thick	E
41	50	350 (14") tabling 50mm thick	E
PILLAR CAPS - GREY Weathered 4 ways - throated all round			
55	48	13" x 13"	F
28	30	17" x 17"	F
17	16	21" x 21"	F
45	40	21" x 12"	F
CONCRETE POSTS WET-CAST			
16	27	Slotted Posts END/INTER 8'	D
21	27	Slotted Posts END/INTER 6'	D
13	16	Slotted Posts CORNER 8'	D
17	16	Slotted Posts CORNER 6'	D
GRAVEL BOARDS WET-CAST			
16	24	6' x 12" x 2" Rockface or Smooth	D
39	18	6' x 6" x 2" Smooth	D
38	36	4" x 4" x 3'6" Reinforced Repair Posts	D
34	36	4" x 4" x 4'6" Reinforced Repair Posts	D
		Bolts to suit	G
SEMI-DRY CAST CONCRETE POSTS (ECONOMY RANGE)			
31	36	Slotted Post 6' x 4 $\frac{1}{2}$ " x 4"	D
23	36	Slotted Post 8' x 4 $\frac{1}{2}$ " x 4"	D
18	36	Slotted post 10' x 4 $\frac{1}{2}$ " x 4"	D
SEMI-DRY GRAVEL BOARDS (ECONOMY RANGE)			
39	20	6' x 6" x 2"	D
BOLLARDS 1350 x 225 > 150			
10	10		H
CONCRETE FEET 680 x 210 x 140			
33	30		I
PADSTONES			
31	40	440 x 140 x 215mm	J
62	80	215 x 140 x 215mm	J
45	50	440 x 215 x 100mm	J
90	100	215 x 215 x 100mm	J
66	80	440 x 140 x 100mm	J

STOWELL
CONCRETE LIMITED

Arnolds Way, Yatton,
Bristol BS49 4QN
also at Holcombe & Cheddar
Tel: 01934 834000
Fax: 01934 835474
www.stowellconcrete.co.uk

11/16

Product packaging data and code

Per tonne	Banded in		Packaging code
		PRESTRESSED CONCRETE LINTELS BS EN 845-2	
63 metres	27	100 x 65 mm	K
27 metres	16	150 x 100 mm	K
19 metres	10	215 x 100 mm	K
		CONCRETE BARRIERS	
1.05	N/A	1500 x 605 x 780mm Grey	G
		CONCRETE FLOOR BEAMS BS EN 15037-1	
29 metres	N/A	5 wire "T" beams For any designs, plans and prices please contact beams@stowellconcrete.co.uk	L
		BEAM ACCESSORIES	
625	416	215 x 100 x 38mm (block) Slips	M
590/710	264	195 x 100 x 38/32mm (cut slab) Slips	J
250 per box	N/A	Ceiling Clips - T Beams	N
20 per box	N/A	Air Vents	O
20 per box	N/A	Air Bricks	P
		Joist Hangers	G
		VINTAGE - TRADITIONAL ANTIQUE STYLE FLAGSTONES CARE: Sizes are nominal. Please check!	
17	22	36" x 24" VINTAGE	Q
21	22	30" x 24" VINTAGE	Q
27	22	24" x 24" VINTAGE	R
37	22	24" x 18" VINTAGE	R
48	22	18" x 18" VINTAGE	S
58	22	24" x 12" VINTAGE	R
77	22	18" x 12" VINTAGE	S
125	44	12" x 12" VINTAGE	R
		VIBRATED PATIO PAVING FLAGSTONES – 1½" thick CARE: Slabs are made to metric sizes but listed as imperial to distinguish. Please check!	
52	30	18" x 18" GREY, BUFF, CHARCOAL, CREAM	S

STOWELL
CONCRETE LIMITED

Arnolds Way, Yatton,
Bristol BS49 4QN
also at Holcombe & Cheddar
Tel: 01934 834000
Fax: 01934 835474
www.stowellconcrete.co.uk
11/16

Product packaging data and code

Per tonne	Banded in	BUILDING BLOCKS BS EN 771-3	Packaging code
		Solid Concrete Blocks Limestone Aggregate 7.3N/mm²	
72	56	440 x 215 x 75mm	T
54	44	440 x 215 x 100mm †	T
38	32	440 x 215 x 140mm †	T
		Solid Concrete Blocks Limestone Aggregate 10.4N/mm²	
50	44	440 x 215 x 100mm †	T
36	32	440 x 215 x 140mm †	T
26	24	440 x 215 x 190mm	T
		Solid Concrete Blocks Limestone Aggregate 17.5N/mm²	
48	44	440 x 215 x 100mm	T
34	32	440 x 215 x 140mm	T
		Stowlite Lightweight Blocks 7.3N/mm²	
68	44	440 x 215 x 100mm †	T
51	32	440 x 215 x 140mm †	T
		Stowlite Lightweight Blocks 10.4N/mm²	
64	44	440 x 215 x 100mm	T
46	32	440 x 215 x 140mm	T
		Hollow Concrete Blocks 7.3N/mm²	
52	16	440 x 215 x 140mm	T
36	10	440 x 215 x 215mm	T
		Fibotherm Insulation Blocks 3.6N/mm²	
150	56	440 x 215 x 75mm	T
110	44	440 x 215 x 100mm	T
80	32	440 x 215 x 140mm	T
		Generation 2 Macro Blocks	
1.6	N/A	Interlocking 2 Void	G
1.7	N/A	Whole Male End	G
3.6	2	Half Female End	T

† manufactured in close texture

STOWELL
CONCRETE LIMITED

Arnolds Way, Yatton,
Bristol BS49 4QN
also at Holcombe & Cheddar
Tel: 01934 834000
Fax: 01934 835474
www.stowellconcrete.co.uk
11/16

Product packaging data and code

Per tonne	Banded in	BUILDING BLOCKS BS EN 771-3	Packaging code
63	33	FOUNDATION (TRENCH) BLOCKS 7.3N/mm² 350 x 100 x 300mm Stowlite	T
56	22	T-Shape Blocks 7.3N/mm² (Recessed) notched to match T Beams 100 x 215 x 440mm RD440	T
60	44	100 x 440 x 215mm RD215	T
57	24	Midi Blocks (dense) M290 10.4N/mm² 290 x 215 x 140mm †	T
57	48	Midi Blocks (dense) M440 10.4N/mm² 440 x 140 x 140mm †	T
115	88	Soap Bar Blocks (Dollies) 10.4N/mm² 440 x 100 x 100mm	T
82	66	440 x 140 x 100mm	T
63	55	Stowell 178 Blocks 10.4N/mm² 440 x 100 x 178mm	T
45	40	440 x 140 x 178mm	T
340	128	Dense Coursing Bricks 10.4N/mm² 215 x 65 x 100mm	T
240	96	215 x 65 x 140mm	T
430	128	Stowlite Coursing Bricks 10.4N/mm² 215 x 65 x 100mm	T
310	96	215 x 65 x 140mm	T
500	128	Stowlite Coursing Bricks 7.3N/mm² 215 x 65 x 100mm	T
360	96	215 x 65 x 140mm	T
740	128	Fibotherm Coursing Bricks 3.6N/mm² 215 x 65 x 100mm	T
530	96	215 x 65 x 140mm	T

† manufactured in close texture

STOWELL
CONCRETE LIMITED

Arnolds Way, Yatton,
Bristol BS49 4QN
also at Holcombe & Cheddar
Tel: 01934 834000
Fax: 01934 835474
www.stowellconcrete.co.uk
11/16